



1 0 - Plumbing - Fire System
1:50

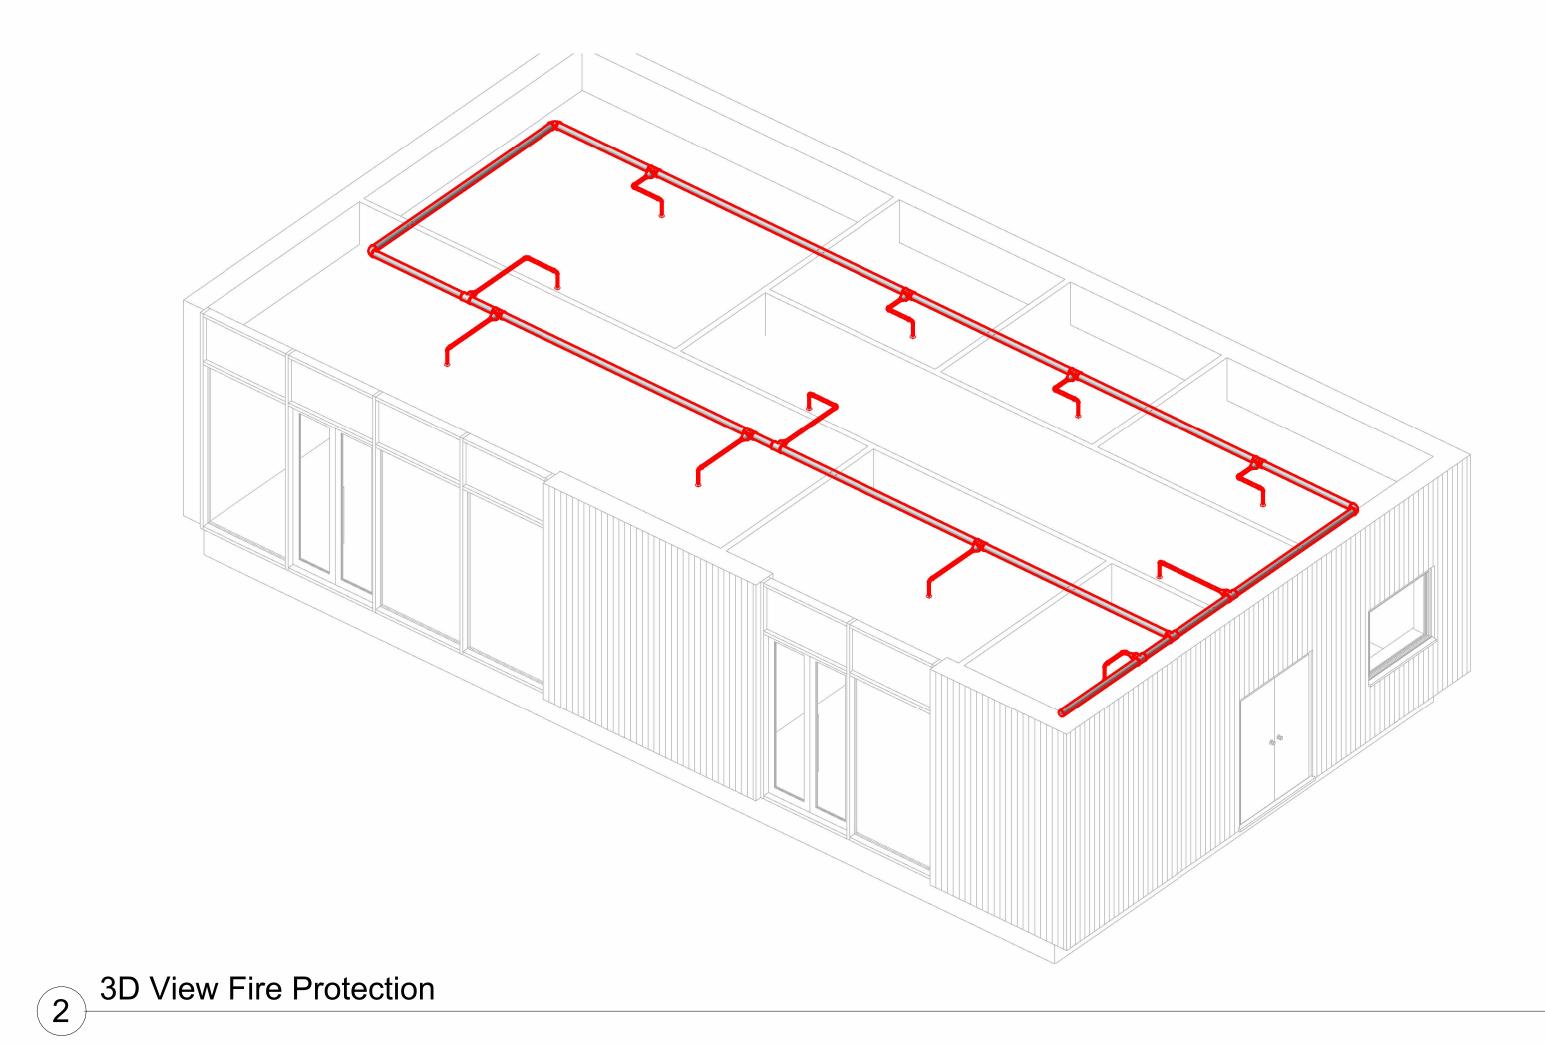

Family and Type	Size	Count	
Elbow - Threaded - GMI: Standard	15 mmø-15 mmø	11	
Elbow - Threaded - GMI: Standard	25 mmø-25 mmø	7	
Elbow - Threaded - GMI: Standard	80 mmø-80 mmø	3	
Socket Reducing - Threaded - GMI: Standard	25 mmø-15 mmø	11	
Socket Reducing - Threaded - GMI: Standard	80 mmø-25 mmø	11	
Tee - Threaded - GMI: Standard	80 mmø-80 mmø-80 mmø	12	

Fire Protection Pipe Fitting Schedule

Sprinkler Schedule						
Mark	Family and Type	Flow	Level			
1	M Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0			
2	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0			
3	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0			
4	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0			
5	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0			
6	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0			
7	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0			
8	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0			
9	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0			
10	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0			
11	M Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0			

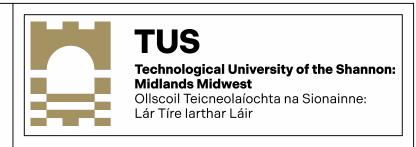

## Revit MEP Spring 2022

Rev	Description	Date	
CODE SUITABILITY DESCRIPTION			

**Educational Exercise** NOT FOR CONSTRUCTION

PURPOSE OF ISSUE

Construction

PROJECT

STATUS

Revit MEP-03

Fire Protection

Owner

DRAWN BY	CHECKED BY		DATE	
PV	Checker		10/22/20	
• •				
SCALE (@ A1)	CALE (@ A1)		PROJECT NUMBER	
1 : 50		RMEP03		
				REV
DRAWING NUMBER				
M-102				