


1 0 - Plumbing - Fire System
1:50



Fire Protection Pipe Fitting Schedule				
Family and Type	Size	Count		
Elbow - Threaded - GMI: Standard	15 mmø-15 mmø	11		
Elbow - Threaded - GMI: Standard	25 mmø-25 mmø	7		
Elbow - Threaded - GMI: Standard	80 mmø-80 mmø	3		
Socket Reducing - Threaded - GMI: Standard	25 mmø-15 mmø	11		
Socket Reducing - Threaded - GMI: Standard	80 mmø-25 mmø	11		
Tee - Threaded - GMI: Standard	80 mmø-80 mmø-80 mmø	12		

Sprinkler Schedule					
Mark	Family and Type	Flow	Level		
1	M Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0		
2	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0		
3	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0		
4	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0		
5	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0		
6	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0		
7	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0		
8	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0		
9	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0		
10	M_Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0		
11	M Sprinkler - Pendent - Semi-Recessed - Hosted: 15 mm Pendent	2.0 L/s	Level 0		

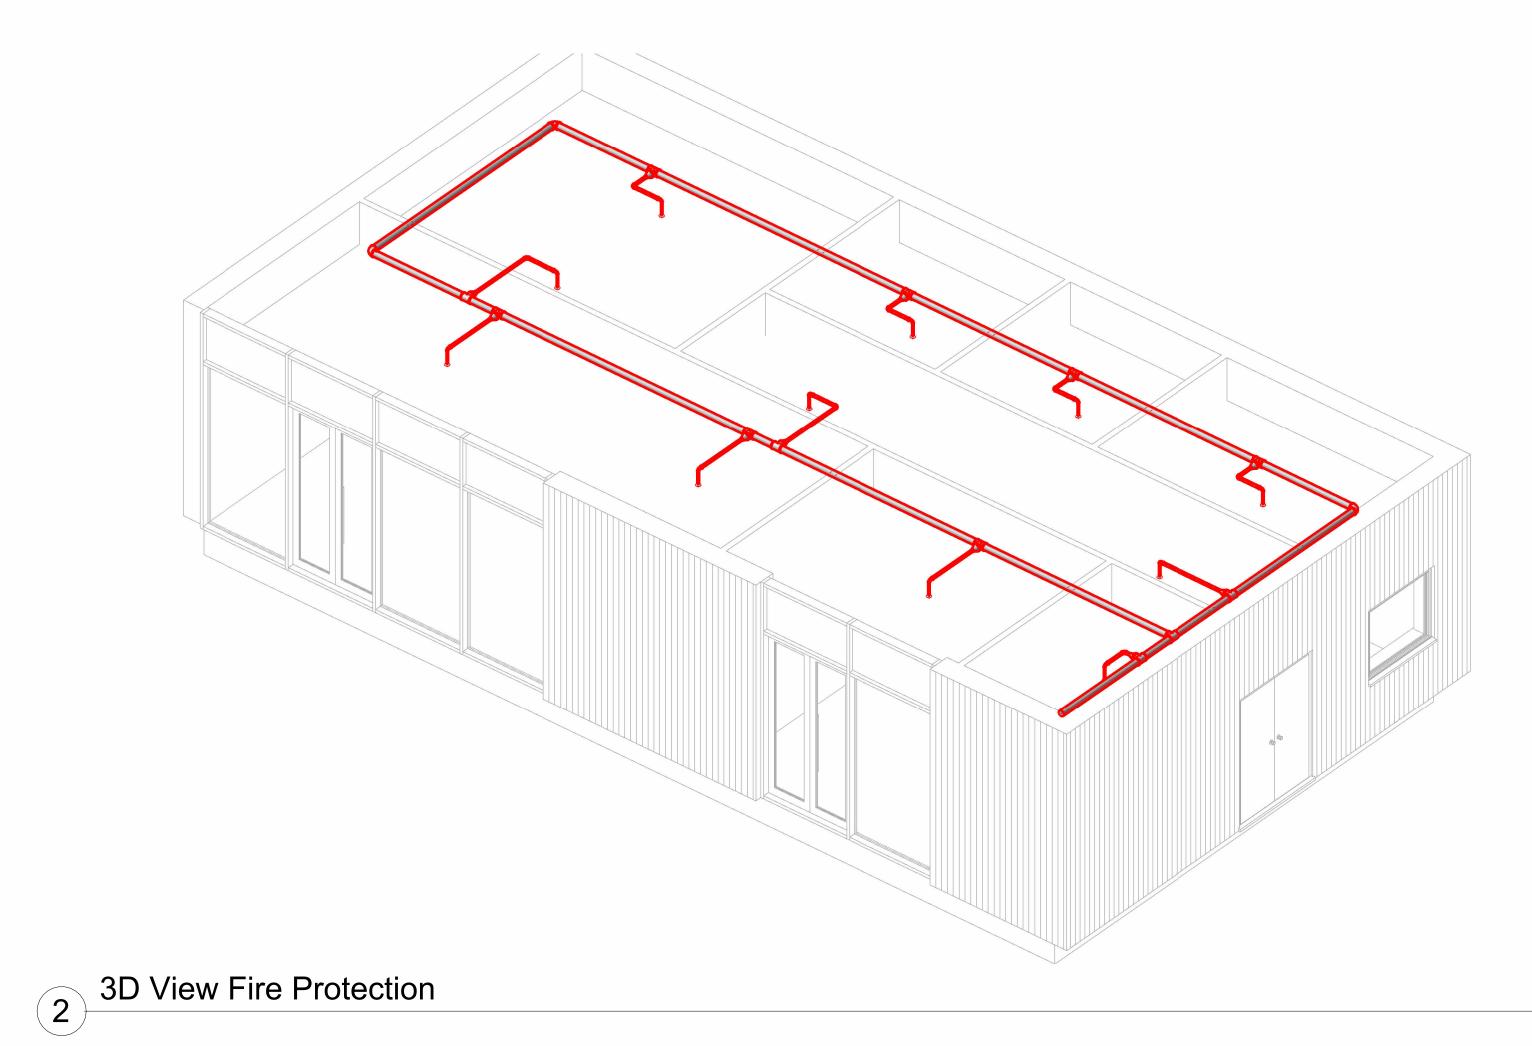

## Revit MEP Autumn 2021

Rev	Description	Date
ODE SUITABILITY DESCRIPTION		

A1 Construction

STATUS PURPOSE OF ISSUE

Educational Exercise NOT FOR CONSTRUCTION

PROJECT

Revit MEP-03

TITL

Fire Protection

CLIENT

Owner

DRAWN BY CHECKED BY DATE
PV Checker 10/22/20

SCALE (@ A1) PROJECT NUMBER
RMEP03

DRAWING NUMBER
M-102